

E3231F



经典延续！全新升级！

- 内置开关电源供电，从此不用再拖一只外置适配器；
- 能适用于100~240V的电网；
- 采用AI和SMT全机械加工，优化模块加工工艺；
- 电源板跳线优化接线方式，杜绝接触不良的情况；
- 采用ELAN高可靠高音质电容；
- 钣金机箱采用镀锌板，具有更好的接触性能；
- Adopt AI and SMT all mechanical processing and better module processing technique.
- Can accept 100~240V voltage.
- Powered by built in SMPS, no need to add an extra adapter any more.
- Improved wire connection in PSB, completely eradicate the bad contact.
- Adopt reliable and high sound quality ELAN capacity.
Zincification casing, good osculation performance.



世界电压开关电源
Integration world
voltage SMPS




线路器件及加工工艺优化
Improved circuitry
components
and processing technique



电源板连接线优化
Improved wire connection
in PSB

型号 Model	E3231F 反馈指示双31段均衡器 E3231F Feedback display EQ
信噪比S/N rate (A weight) :	>95dB
频响Frequency response :	20Hz-20kHz ±0.5dB
失真THD% :	<0.01%
指示控制Precision of the central	
频率Frequency :	>90%
均衡增益控制EQ control gain :	±15dB
动态范围Dynamic range :	118dB
输入增益Input gain :	-∞- +6dB

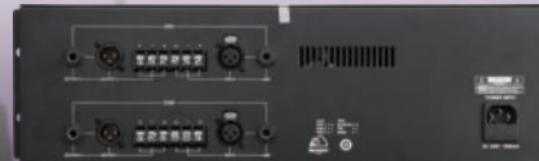

备注：

- 1、数据按：Q/SAE 1-2009标准测试得出。
- 2、SAE保留对以上参数的解释权，参数有所变动恕不另行通告，最后参数以产品说明书为准。

Remark :

1. Other data is tested under Q/SAE 1-2009 standard.
2. SAE reserves the right to make changes in specification without prior notice.
The final specification is subject to the user manual.